


**Bullicart HR®**

■ **MODELO:**
BFS Inoxidable
BFG Galvanizada



Conforms to EN ISO3691-5:2009
 Based on Directive 2006/42/EC

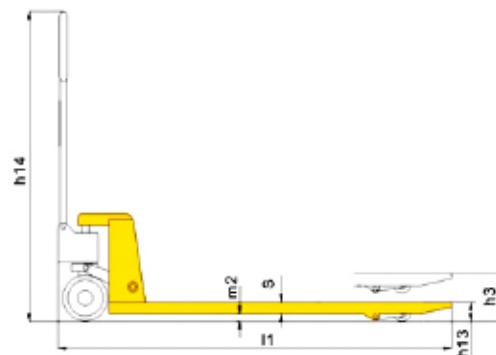

MODELO		BFS	BFG
Capacidad	Q(kg)	2500	2500
Altura bajada de la horquilla	h13(mm)	85/75	85/75
Volante	mm	Ø200/Ø180	Ø200/Ø180
Rueda de la horquilla sola	mm	Ø74x93	Ø80x93/Ø74x93
Tándem de rueda de horquilla	mm	Ø74x70	Ø80x70/Ø74x70
Max. altura de elevación	h3(mm)	200/190	200/190
Altura total	h14(mm)	1224/1214	1224/1214
Longitud total	l1(mm)	1533/1603	1533/1603
Dimensiones de horquilla	s/e/l	45/160/1150(1220)	45/160/1150(1220)
Ancho general de horquillas	b5(mm)	520/550/685	520/550/685
Distancia al suelo, centro de la distancia entre ejes	m2(mm)	40/30	40/30
Ancho de pasillo para palets de 1000 x 1200 cruzados	Ast(mm)	1733/1803	1733/1803
Ancho de pasillo para palets de 800 x 1200 a lo largo	Ast(mm)	1783/1803	1783/1803
Radio de giro	Wa(mm)	1266/1336	1266/1336
Peso del servicio	kg	65-80	65-80